


GRAPHICS FAQ

TL 360 single barcode

Image not true to scale

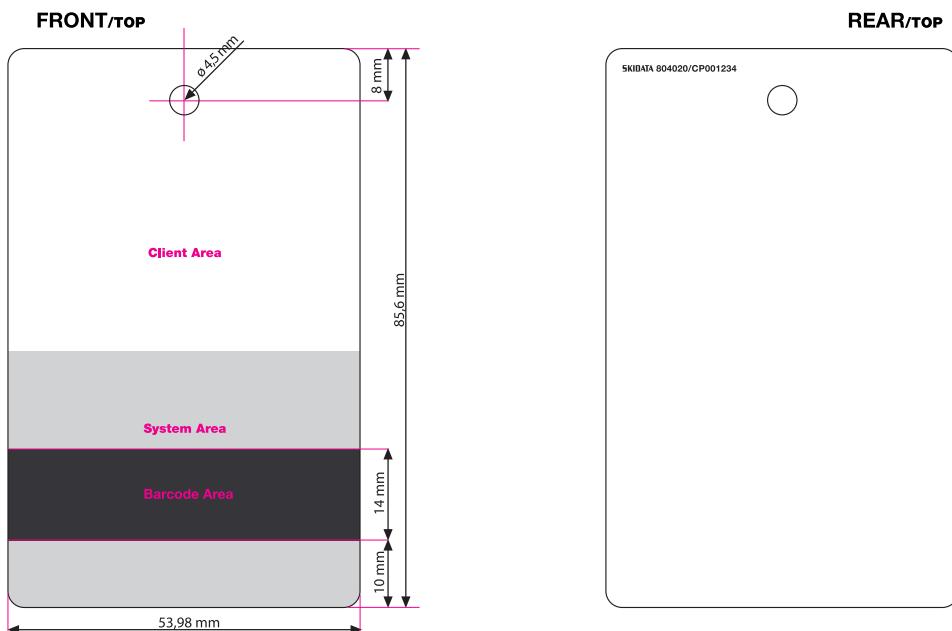

"FSC®" and "PVC-Free" logos will be added by SKIDATA depending on the Design on Front or Rear.

Technical specs

Format:	w 53.98 mm; h 85.6 mm
Printing:	Offset 4c Euroscales (CMYK), 60 #
Pictures:	1:1 images at 300dpi, CMYK mode
Overfill/Bleed:	1.5 mm all sides
Design Area:	the shades area is reserved for POS imprinting and should be left blank (white). If the entire face of the card needs to be imprinted, the shaded areas may only be printed with max. 15% opacity
Copy protection bar:	used for barcode printing and must be kept blank the graphic layout

Print specs

File Formats:	Adobe Illustrator Adobe InDesign Adobe Photoshop If you intend to send us data in a different format please consult in advance with Graphic Department
Design Template:	<ul style="list-style-type: none">Texts and logos must keep 2 mm margin from the edge and the clip on holeType faces/fonts must be converted to paths/vektors or sent together with the other filesTo ensure the ability to modify text in pdf files, it is necessary to convert them into paths/vektors
Datatransfer:	E-mail, FTP Server If you have any further questions please contact the Graphics Dept. at +43 (0) 6246 888-0